

Floor Undercoat/Sealer


Jangro

When dosing concentrate chemicals always use the recommended PPE, and always read the labels to check best practice for handling both the undiluted & ready to use solutions.


Product Usage Guide

PREMIUM


BD240-5




1 Use appropriate PPE as indicated in the Safety Data Sheet and place Safety Signs.

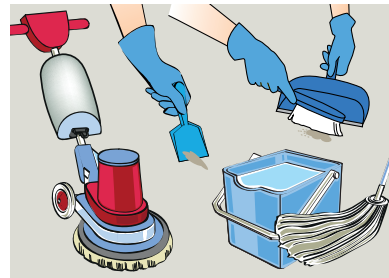


2 Prepare the floor, remove all traces of old polish/sealer. Ensure floor is clean dry and neutral.
Refer to the Jangro Floor Care Chart or the Product Usage Guide for floor polish remover guidance on floor preparation.




3 Pour sealer into bucket or tray. (undiluted).




4 Place flat mop or applicator into sealer. Remove surplus.




5 Apply sealer to dry floor, thinly and evenly in straight lines.



6 Leave to dry for 30 minutes between coats.

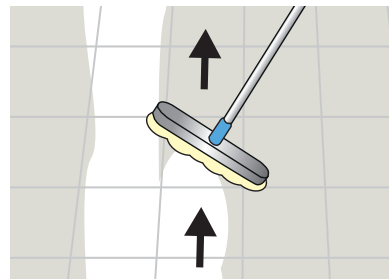

7 Ensure floor is free from debris/dust before applying a second coat. Leave a 2.5-5cm gap from the edge.



8 Leave to dry for 30 minutes



9 Remove Safety Signs.



10 Next step use your preferred Jangro floor polish for the best finish.

Health & Safety

Please refer to relevant COSHH Safety Data Sheet



Scan for further product details



Floor undercoat/sealer cannot be removed with conventional stripper and should be used with care.

www.jangro.net